



DPP

DESCRIPTION:


Perforated ceiling diffuser with (24" x 24"):

- + Perforated steel with 50% free area distribution.
- + High eficiency distribution plate of polyurethane FINISH: $(\frac{1}{2}$ " thickness) completely enclosed with aluminum Electrostastic baked paint (polyester) in Vermont foil as a vapor barrier.
- + Round neck to easily connect with flexible duct.

MATERIALS:

Perforated sheet steel in 26 gauge (24 optional) with injected polyurethane adapter-box of 1/2" of thickness and aluminum foil.

white, perforated face plate and airtight packaging.

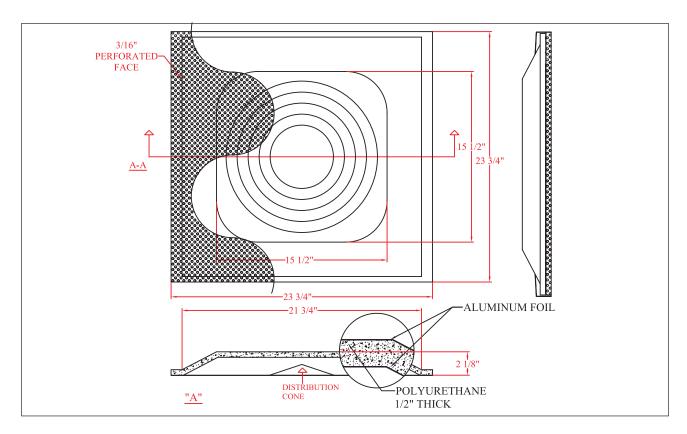

AIR DISTRIBUTION PRODUCTS