



MATERIALS:

Modules 26 gauge steel sheet. Rolled and stamped necks, galvanized metal sheet 26 gauge. Fiberglass insulation R-6 or R-8.

FINISH:


Baked electrostatic paint (polyester) white Vermont as standard finish or bright white. Sealed plastic packaging.

DT3 Aluminum DTA3 Steel DESCRIPTION:

Diffuser in aluminum or steel, high efficiency, for false ceiling mounted 24 "x 24" (nominal) has 3 modules with standard 4-way distribution.

Round neck for connection to flexible conduit in diameters from 4 "to 16" in increments of 2" fiberglass insulation.

Excellent performance in systems of variable air volume.

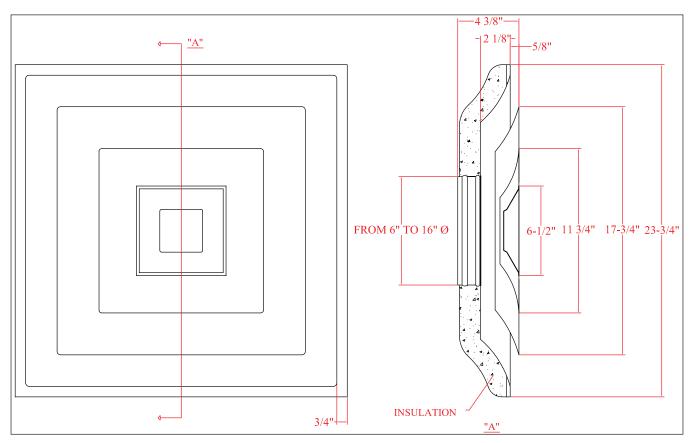

AIR DISTRIBUTION PRODUCTS